



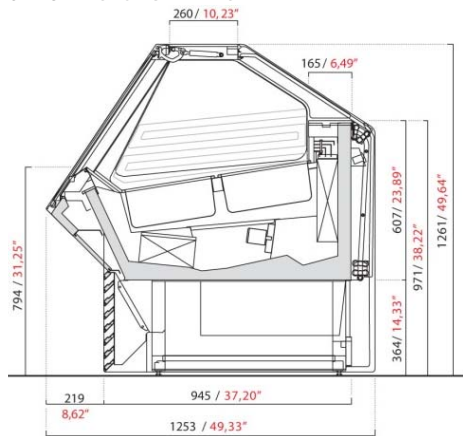
SCREEN

GELATO "4 stagioni" / "4 seasons" GELATO DISPLAY CASE

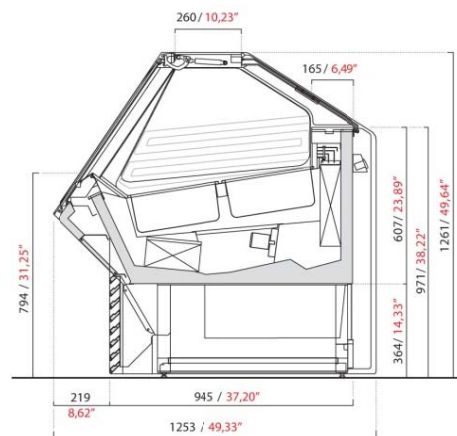


CARATTERISTICHE TECNICHE	OPTIONAL	TECHNICAL SPECIFICATIONS	OPTIONALS
<ul style="list-style-type: none"> - vasca monoblocco schiumata in poliuretano iniettato a 40 kg/m³ - castello vetri in alluminio lucido brillantato e nero - vetro frontale piroolitico, riscaldato e temperato che si apre dal basso verso l'alto per mezzo di pistoni a gas - fianchi sagomati in poliuretano iniettato ad alta densità di spessore 112,5 mm con vetro frontale piroolitico, riscaldato e temperato e vetro laterale float curvo con pista riscaldante. - tetto fisso in vetro acidato profondo 260 mm - chiusura posteriore con ante scorrevoli in plexiglas - versione HCS con sistema di chiusura tramite pannello in vetroresina che consente di conservare il gelato dentro la vetrina - gestione degli sbrinamenti tramite sistema RDF (Reduced Defrosting Frequency) - termostato elettronico con visualizzatore temperatura e ripetitore lato cliente - piano espositivo inclinato di 9° - illuminazione a LED - refrigerazione ventilata con doppio evaporatore - sbrinamento a gas caldo con motore a bordo, a inversione di ciclo con motore esterno 	<ul style="list-style-type: none"> - versione 4 stagioni: grazie al pulsante di commutazione è possibile con un semplice "click" passare dalla funzione gelateria BT (= temperatura negativa -12°C/-18°C) alla funzione pasticceria o snack TN (= temperatura positiva +4°C/+8°C) - vaschette gelato 360x165 - vaschette gelato 360x250 - lavaporizzatore - piano espositivo in acciaio inox da sostituire alle vaschette gelato - ruote - modulo TD con temperatura differenziata - unità condensatrice remota - tropicalizzazione: unità condensatrice remota testata a +43°C ambiente 	<ul style="list-style-type: none"> - monobloc foam tank insulated with injected polyurethane (40 kg/m³) - glass structure in shiny and black aluminium - tempered and heated with lift-up opening by means of gas-operated Pistons - shaped side panels made of high density polyurethane, 112,5 mm thick, with pyrolytic, tempered and heated glass front and a curved, tempered lateral side glass with a heating track - glass upper top 260 mm deep - rear closure with sliding Plexiglas panels - HCS Closure System version, by fiberglass rear panel, which allows to preserve gelatos inside the display case - defrosting controlled by RDF system (Reduced Defrosting Frequency) - electronic thermostat with temperature display and relative repeater on customer's side - the display shelf is 9° inclined to optimize the gelato visibility - LED lighting - ventilated refrigeration system with double evaporator - hot gas cycle defrosting system, with condenser on board; reverse gas cycle defrosting system, with remote condenser 	<ul style="list-style-type: none"> - "4 Seasons" version: by just clicking the change button the case can be turned from gelato (BT = low temperature -12°C/-18°C) to pastry (TN = positive temperature +4°C/+8°C) - gelato pans: 360x165 mm / 14.17"x6.5" - gelato pans: 360x250 mm / 14.17"x9.84" - scoop washer - stainless steel displaying surface to replace the gelato pans - castor wheels - TD differentiated temperature unit - remote condensing unit - tropicalization: remote condensing unit tested at +43°C / 109.4°F ambient temperature - TD version: it is possible to incorporate a sector with differentiated temperature

SEZIONI SECTION VIEWS









HCS
chiusura lato operatore con pannello in vetroresina
rear closure by panel in fibreglass



PLEXIGLAS
chiusura lato operatore con scorrevoli in plexiglas
rear closure by Plexiglas sliding doors

MODULI E VASCHE GELATO UNITS AND GELATO PAN LAYOUTS


	*1125 / *44.30"	*1625 / *63.97"	*2125 / *83.66"		
360x165 14.2"x6.5"  6+6  9+9  12+12	CAPIENZA VASCHE GELATO GELATO PAN CAPACITY 360x165 / 14.2"x6.5"			H 120 mm / H 4.72" → 5 litri / 5 liters H 150 mm / H 5.91" → 7 litri / 7 liters	
360x250 14.2"x9.8"  4+4  6+6  8+8	CAPIENZA VASCHE GELATO GELATO PAN CAPACITY 360x250 / 14.2"x9.8"			H 80 mm / H 3.15" → 5,5 litri / 5.5 liters H 120 mm / H 4.72" → 8,5 litri / 8.5 liters H 150 mm / H 5.91" → 10,5 litri / 10.5 liters	

*misure senza fianchi: 1 fianco spessore 112,5 mm / *end panels not included: 1 end panel 112,5 mm / 4.43" thick

DIMENSIONI, PESO E IMBALLO DIMENSIONS, WEIGHT AND PACKAGING

MODELLO MODEL	LUNGHEZZA LENGTH		PROFONDITÀ DEPTH		ALTEZZA HEIGHT		PESO WEIGHT		DIMENSIONE IMBALLO PACKAGING DIMENSIONS		PESO con imballo CRATED WEIGHT	
	mm	in	mm	in	mm	in	kg	lb	mm	in	kg	lb
L 1125	1350	53.15"	1253	49.33"	1261	49.64"	240	529	1454x1364xH1484	57.2"x53.7"xH58.4"	308	679
L 1625	1850	73.82"	1253	49.33"	1261	49.64"	325	717	1954x1364xH1484	76.9"x53.7"xH58.4"	413	911
L 2125	2350	92.52"	1253	49.33"	1261	49.64"	420	926	2454x1364xH1484	96.6"x53.7"xH58.4"	527	1162

DATI TECNICI TECHNICAL SPECIFICATIONS

 3065103 ETL* - NSF 7 - UL STD 471 US - CAN/CSA C22.2 STD n. 120 Intertek Intertek						UC CON MOTORE A BORDO WITH BUILT-IN AIR-COOLED CONDENSING UNIT						TENSIONE E FREQUENZA VOLTAGE AND FREQUENCY V/Ph/Hz 208-220/1/60					
MODELLO MODEL		POTENZA COMP. HP	BREAKER SIZE	MCA	MOP	RESA CAPACITY		CLASSE CLIMATICA CLIMATE CLASS			TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE						
		HP	A	A	A	W/h -30°C	BTU/h -22°F	°C	°F	U.R. R.H.	°C	°F					
L 1125		2	15	13	18	1500	5.115	35°C	95°F	60%	-2°C; -18°C	+28.4°F; -0.4°F					
L 1625		2+2	25	23	30	3000	10.230	35°C	95°F	60%	-2°C; -18°C	+28.4°F; -0.4°F					
L 2125		2+2	25	23	30	3000	10.230	35°C	95°F	60%	-2°C; -18°C	+28.4°F; -0.4°F					

 UC CON MOTORE A BORDO WITH BUILT-IN AIR-COOLED CONDENSING UNIT						TENSIONE E FREQUENZA VOLTAGE AND FREQUENCY TRIFASE - V/Ph/Hz 400/3/50 MONOFASE - V/Ph/Hz 230/1/50					
--	--	--	--	--	--	--	--	--	--	--	--

MODELLO MODEL	POTENZA ASSORBITA CURRENT CONSUMPTION				RESA COOLING CAPACITY				CLASSE CLIMATICA CLIMATE CLASS			TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	
	trifase 400/3/50		monofase 230/1/50		trifase 400/3/50		monofase 230/1/50		°C	°F	U.R. R.H.	°C	°F
		W	A	W	A	W/h -30°C	BTU/h -22°F	W/h -30°C	BTU/h -22°F				
L 1125		2158	7.50	1915	9.4	1580	5.388	1085	3.700	35°C	95°F	60%	-2°C; -18°C +28.4°F; -0.4°F
L 1625		2260	8.01	2476	12.81	1580	5.388	1750	5.968	35°C	95°F	60%	-2°C; -18°C +28.4°F; -0.4°F
L 2125		2721	10.01	3269	15.65	2100	7.161	2170	7.400	35°C	95°F	60%	-2°C; -18°C +28.4°F; -0.4°F
L 1625 TD		2320	9.08	2527	12.78	1190 + 615	4.058 + 2.097	1085 + 615	3.700 + 2.097	35°C	95°F	60%	-2°C; -18°C +28.4°F; -0.4°F
L 2125 TD		2851	11.44	2771	15.14	1580 + 615	5.388 + 2.097	1750 + 615	5.968 + 2.097	35°C	95°F	60%	-2°C; -18°C +28.4°F; -0.4°F

 CON MOTORE REMOTO ENTRO 22 METRI WITH CONDENSING UNIT WITHIN 22 METERS						TENSIONE E FREQUENZA / VOLTAGE AND FREQUENCY TRIFASE - V/Ph/Hz 400/3/50					
---	--	--	--	--	--	---	--	--	--	--	--

MODELLO MODEL	POTENZA ASSORBITA CURRENT CONSUMPTION				RESA COOLING CAPACITY				CLASSE CLIMATICA CLIMATE CLASS			TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	
	trifase 400/3/50		trifase 400/3/50		trifase 400/3/50		trifase 400/3/50		°C	°F	U.R. R.H.	°C	°F
		W	A	W/h -30°C	BTU/h -22°F	W/h -30°C	BTU/h -22°F						
L 1125		1688	5.26	1580	5.388	1580	5.388	35°C	95°F	60%	-2°C; -18°C	+28.4°F; -0.4°F	
L 1625		2160	7.16	2100	7.161	2100	7.161	35°C	95°F	60%	-2°C; -18°C	+28.4°F; -0.4°F	
L 2125		2251	7.56	2100	7.161	2100	7.161	35°C	95°F	60%	-2°C; -18°C	+28.4°F; -0.4°F	
L 1125 TD*		635+635	2.2+2.2	865+865	2.950+2.950	865+865	2.950+2.950	35°C	95°F	60%	-2°C; -18°C	+28.4°F; -0.4°F	
L 1625 TD*		1340+635	3.4+2.2	1580+865	5.388+2.950	1580+865	5.388+2.950	35°C	95°F	60%	-2°C; -18°C	+28.4°F; -0.4°F	
L 2125 TD*		1710+635	5+2.2	2100+865	7.161+2.950	2100+865	7.161+2.950	35°C	95°F	60%	-2°C; -18°C	+28.4°F; -0.4°F	

*TD = settore con temperatura differenziata (3+3 vaschette 360x165 mm) / sector with differentiated temperature (3+3 360x165 mm pans)